




GAFLAS®

PLY 4

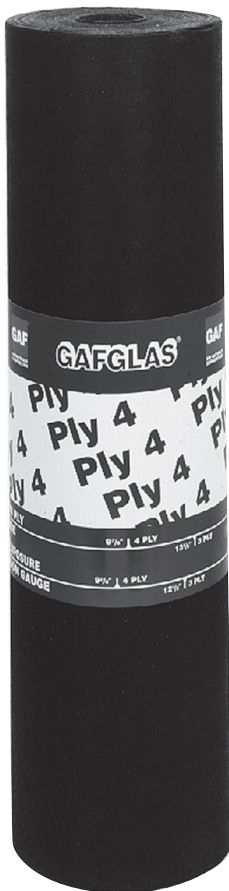

Description

GAFLAS® Ply 4 roofing felt is constructed with a strong glass fiber mat that is coated with the finest quality asphalt, and is designed with optimum porosity to assure a sound, watertight membrane.

Uses

GAFLAS Ply 4 is used as a ply felt in the construction of built-up roofs. It is designed for use in all climate zones and is appropriate for use as a base sheet, as a ply felt, and in the construction of flashing membranes.

Advantages

- High tensile strength and a high degree of dimensional stability, resulting in a roof system with greater resistance to splitting and cracking
- Optimum porosity of the felt provides ready escape of air while allowing proper asphalt penetration at the time of mopping
- Asphalt coating provides high degree of moisture resistance
- Fire resistant—for use in UL Class A rated assemblies
- Wind uplift resistance—selected roofing assemblies with GAFLAS Ply 4 felts meet FMRC Class 1-180 when installed over concrete decks

Advantages (Continued)

- Meets ASTM D-2178, Type IV specifications
- Meets requirements for application in all climate zones
- Rolls out flat for easy installation
- Typical system guarantees available for up to 15 years, select system constructions available with up to 20 year guarantee coverage.

Applicable Standards

Meets ASTM D2178, Type IV
FM Approved
ICC ESR#1274
Miami-Dade County Product Control Approval
UL/ULc Listed

Products Specifications (nominal)

Roll Size	5 squares (531 gross sq.ft.) (49.3m ²)
Roll Length	161.8' (49.3m)
Roll Width	39.375" (1.0m)
Approx. Roll Weight	34.9 lbs (20.0kg)