

Document Number:	PUB-DRU292551
Publication Date:	2015-01-15
Revised:	2015-04-30
Revaluation Date:	2018-01-15

Supplier:



Mod-Bit system Fast-N-Stick 180 Base mechanically attached, Mechanically Attached Roof System (MARS)

Roofing System Summary :

- Cap sheet membrane: Modified Bituminous Membrane or allowable products
- Base sheet membrane: Modified Bituminous Membrane
- Cover board: Optional
- Insulation: Polyisocyanurate or allowable products
- Vapour barrier: Membrane or allowable products
- Thermal barrier: Optional
- Decking: Steel Deck
- Dynamic Uplift Resistance (DUR) as per CSA A123.21:

Description	Test observation reading	With SF of 1.5
System A	-2.9 kPa(-60 psf)	-1.9 kPa(-40 psf)
System B	-7.2 kPa (-150 psf)	-4.8 kPa (-100 psf)

Notes :

Allow products:

Only equivalent products included into the roofing system's report are admissible.

Optional components:

Components of the roofing system designated as optional may be included or excluded from the roofing system which will not change the published dynamic uplift resistance (DUR).

Safety factor:

As required by in the CSA A123.21 Standard, the published dynamic uplift resistance (DUR) are reduced by a safety factor of 1.5 (SF of 1.5)

Admissible wind uplift load calculation:

An online calculator is available at www.sigders.ca. The user will have to provide the following information:

- building location;
- building geometry;
- building exposure;
- building openings;
- building importance factor.

The calculator will display the allowable design load of the roof's field surface, edges and corners as well as the dimensions of the edge and corner zones.

Technical Advisories:

Assessment reports must be read in conjunction with technical advisories issued by **exp** Services Inc.

Values:

For this document, the metric values are the standard and values in parentheses are for information only.

Notice:

Exp Services inc. reserve their right to withdraw, without prior notice, the test report performed as per CSA A123.21 Standard.

Roof System Assessment Report of Wind Uplift Resistance (ISO 17025)

Document Number:	PUB-DRU292551
Publication Date:	2015-01-15
Revised:	2015-04-30
Revaluation Date:	2018-01-15

Roofing System's Specific Data:

Cap Sheet Membrane:

- Allowable products:	IKO		
	Torchflex TP-250 Cap	Prevent TP-250	Armourcool Granular TP-HD
	Torchflex TPQ-250 Cap	Prevent Premium TP-250	Armourcool Granular Prevent TP-HD
	Torchflex TP-HD	Prevent TP-HD	Armourcool Granular Prevent Premium TP-HD
	Torchflex TP-250 5 mm	Prevent Premium TP-HD	Armourcool Granular TP
Torchflex TP-180 Cap			
- Attachment mode:	Heat welded		

Base sheet membrane:


- Allowable products:	IKO		
	Fast-N-Stick 180 Base	Coversheild Base 180	
Mechanically attached Pattern for System A result	Row spacing	Fasteners spacing	
	890 mm (35 in) o.c.	457 mm (18 in) o.c.	
- Attachment type:	Fasteners #14 DP Round barbed plate, with Galvalume finish of 61 mm (2.4 in)MPB-2400		
- Pullout fastener resistance:	225 psi or 492 lbf or 2189 Newton		
- Attachment supplier:	Trufast		
Mechanically attached Pattern for System B result	Row spacing	Fasteners spacing	
	457 mm (18 in) o.c.	305 mm (12 in) o.c.	
- Attachment type:	Fasteners #14 DP Round barbed plate, with Galvalume finish of 61 mm (2.4 in)		
- Attachment supplier:	Trufast		

Cover board (optional): See optional products table

Insulation:

- Allowable products:	IKO		
	IKOTherm	IKOTherm Tapered	IKOTherm 25 Tapered psi
	IKOTherm III	IKOTherm III 25 psi	IKOTherm 25 psi
- Allowable thickness:	Between 25 mm (1 in) et 203 mm (8 in)		
Mechanically attached Pattern	Row spacing	Fasteners spacing	
	One fastener every 4 f²	As Mechanically pattern drawing	
- Attachment type:	Pre-assembled # 12 Drill Point Fastener & 76 mm (3 in) Galvalume with Hex head style		
- Pullout fastener resistance:	234 psi or 516 lbf or 2295 Newton		
- Attachment supplier:	Trufast		

Mechanically pattern drawing

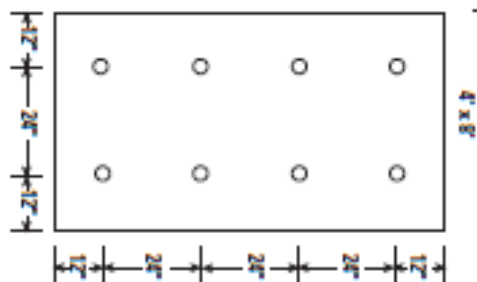



Roof System Assessment Report of Wind Uplift Resistance (ISO 17025)

Document Number:	PUB-DRU292551
Publication Date:	2015-01-15
Revised:	2015-04-30
Revaluation Date:	2018-01-15

Vapour Barrier:

- Allowable products:	IKO	
	ArmourGard	MVP Vapour Retardant
	Generic	
	Polyethylene	Kraft Vapour Retarder
- Attachment mode:	Loose laid, adhered or mechanically attached	

Thermal Barrier (optional): *See optional products table*

Decking:

- Type:	Galvanized construction steel or coated with an aluminum/zinc alloy or PVC in accordance with ASTM A653, ASTM A792, ASTM A1008 or CSSBI 10M Standards.
- Supplier:	Generic
- Thickness:	0.76 mm (0.03 in.) minimum, with a yield strength of 230 MPa (33 ksi) and a tensile strength of 310 MPa (45 ksi) commonly defined as being of a 22 gauge minimum thickness.
- Attachment method:	The deck's fastening to the supporting structure must be strong enough to resist wind uplift loads (adjusted as per NBC requirements).
- Fastening uplift resistance (CSA S136.F04):	2.09 kN (470 pf)
- Equivalence:	Steel deck thickness of 18 to 22 gauges or wood deck or concrete deck with pullout resistance equal or higher than the Fastening uplift resistance specified above.

Optional Products Table:

Cover board:

- Allowable product:	IKO		
	Protectoboard	Protectobase 180	Covershield
	Covershield Base 180		
	Georgia Pacific		
	Dens deck	Dens deck Prime	
	CGC / USG		
	Securock Gypsum Fiber Roof Board		
	Generic		
	Roofing Gypsum board	Wood-fiber	
- Allowable thickness:	Between 3 mm (1/8 in) to 25 mm (1 in)		
- Attachment mode:	Loose laid or adhered or mechanically attached		

Thermal barrier:

- Allowable product:	Georgia Pacific		
	Dens Deck	Dens Deck Prime	
	CGC / USG		
	Securock Gypsum Fiber Roof Board		
	Generic		
	Roofing Gypsum board		
- Allowable thickness:	Between 5 mm (3/16 in) to 25 mm (1 in)		
- Attachment mode:	Loose laid or adhered or mechanically attached		