
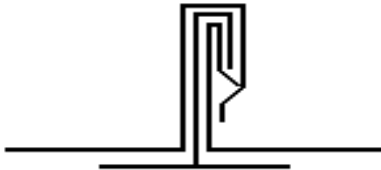


LOAD CAPACITIES BASED ON "GRADE A" STEEL, WITH  
A MINIMUM YIELD STRENGTH OF 33000 PSI

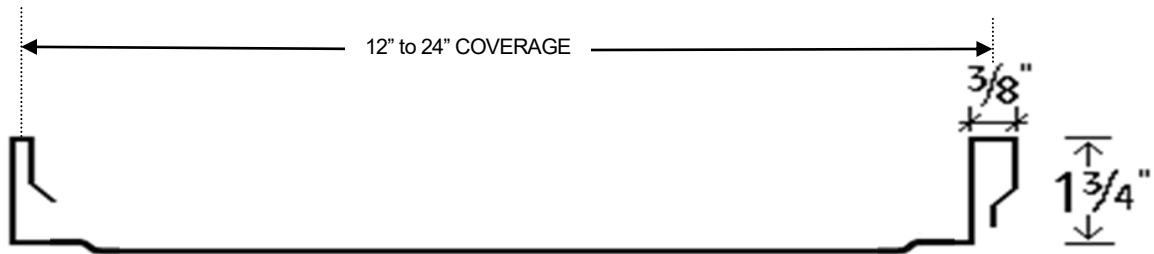

STANDARD CLIP IS 20 GA.,  
UL-90 CLIP IS 18 GA.

- OPTIONAL:**
- A) FLAT
  - B) STRIATIONS
  - C) STIFFENING RIBS

GAUGE	PANEL	SPAN IN FEET				
		3'-0"	3'-6"	4'-0"	4'-6"	5'-0"
24 ga.	12"	119	87	67	53	43
	18"	80	59	45	-	-
	24"	60	44	-	-	-
22 ga.	12"	166	122	93	74	60
	18"	111	82	63	50	-
	24"	84	62	48	-	-
POUNDS PER SQUARE FOOT**						

**\*\*Allowable Load (PSF) Based On:**

- "Grade A" Steel with A Minimum Yield Strength of 33000 PSI;
- Three Span Condition;
- deflection OF L/240

**FINISHES AVAILABLE:**

- A) SMP
- B) PVDF
- C) PLAIN GALVALUME