

IKO MS Detail

DETAIL ACCESSORY



COMMERCIAL



STOCK# 1850079

SIZE: 3.78 L (1 gal)

PAILS PER PALLET: 75

PALLET SIZE: 122 cm x 102 cm

(48 in x 40 in)

PACKAGING: 315 ml sausages

PAIL SIZE: 12 units/pail

COLOUR: Medium Grey

Note: All reported values are nominal.

IKO MS Detail

DETAIL ACCESSORY

Ideal for Complex Detail Areas

IKO MS Detail was designed to coat and protect exposed complex detail areas such as flashings, mechanical equipment, and roof/wall penetrations which would normally require intricate labour.

Waterproof

IKO MS Detail cures as a result of a chemical reaction with the ambient humidity and becomes a tough, monolithic waterproof membrane.

Easy to Apply

IKO MS Detail is a solvent-free, liquid-applied membrane coating that serves as an excellent waterproofing option for hard to reach roof areas.

Multi-Use

IKO MS Detail also may be used for bridging/sealing metal joints, transitions or for coating complex surfaces requiring a membrane.

An excellent liquid membrane option that's solvent-free and dual purpose, let IKO MS Detail go to work for your next commercial roofing project.

- SOLVENT FREE
- PROTECTS
DETAIL AREAS

IKO MS Detail

DETAIL ACCESSORY




IKO building products are responsibly designed and produced with consideration for sustainability and the environment, incorporating quality recycled components where practical, manufactured in facilities that comply with environmental standards.

All local health and safety rules and precautions should be followed when working with IKO products. See also Material Safety Data Sheet MSDS #1253.

Good building practices include ensuring the application surface is adequately prepared for the adhesion of the product prior to installing it. For further details please refer to the "IKO Installation Guidelines".

ISO 9001 – 2008 REGISTERED FACILITY

Please contact your IKO Technical Representative for specific slope requirements.

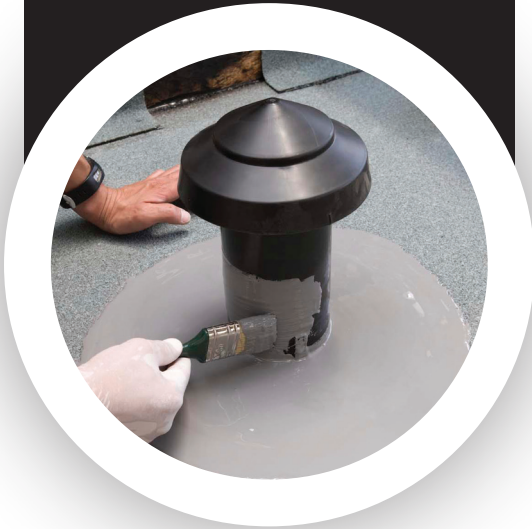

CHARACTERISTICS	UNITS	NOMINAL VALUE
Appearance:	—	Viscous Liquid
Specific Gravity: (@ 25°C)	Kg/L	1.4 - 1.5
Flash Point:	°C (°F)	None
Skin Formation: (@ 20°C)	Minutes	30 - 60
Shelf Life	Months	12
Application Temperature:	°C (°F)	-10 to 40 (15 to 104)
Application Rate:	m ² /3.8L (ft ² /gal.)	2.5 (25)
Service Temperature:	°C (°F)	-20 to 88 (-4 to 190)

The information on this product information sheet is based upon data considered to be true and accurate, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate.