



LOAD CAPACITIES BASED ON "GRADE A" STEEL, WITH
A MINIMUM YIELD STRENGTH OF 33000 PSI

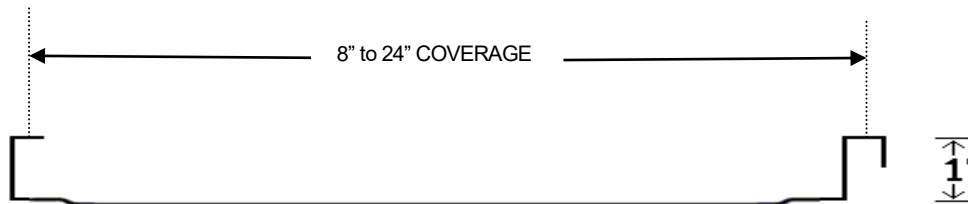

- OPTIONAL: A) FLAT
B) STRIATIONS
C) STIFFENING RIBS

GAUGE	PANEL	SPAN IN FEET		
		1'-0"	1'-6"	2'-0"
24 ga.	12"	250	167	125
	16"	220	133	87
	20"	183	101	49
26 ga.	12"	138	92	69
	16"	104	67	40
	20"	69		
		POUNDS PER SQUARE FOOT		

****Allowable Load (PSF) Based On:**

- "Grade A" Steel with A Minimum Yield Strength of 33000 PSI;
- Three Span Condition;
- deflection OF L/240

FINISHES AVAILABLE:

- A) SMP
- B) PVDF
- C) PLAIN GALVALUME