


Product Data Sheet

Filter Sheet SF


Order No. 2100–2102

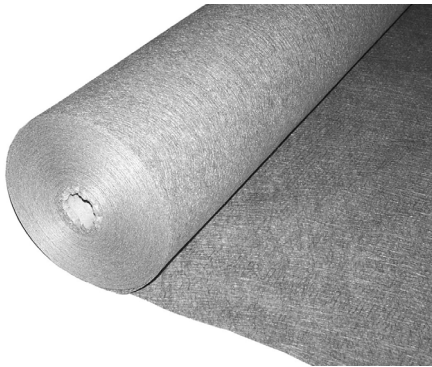

Geotextile of needled and thermally strengthened polypropylene, applicable as filter sheet above drainage elements for normal mechanical stress.



www.zinco-greenroof.com/epd



Technical Data

Filter Sheet SF

Needled and thermally strengthened filter sheet of Polypropylene.


Thickness:	ca. 0.50 mm		
Weight:	ca. 100 g/m ²		
Colour:	grey		
Penetration force according to EN ISO 12236:	ca. 1100 N		
Strength class:	2		
Tensile strength (200 mm) according to EN ISO 10319:	ca. 7.0 kN/m		
Tensile extension lengthwise/crosswise:	ca. 40% / 50%		
Flow rate (H ₅₀) according to EN ISO 11058:	ca. 70 l/(m ² ·s)	(± 0.09 m/s)	
Effective opening width (O ₉₀) according to EN ISO 12956:	ca. 100 µm		
Dimensions:			
length:	ca. 100.00 m	width: ca. 2.00 m	Order No. 2100
		width: ca. 1.00 m	Order No. 2102
length:	ca. 10.00 m	width: ca. 2.00 m	Order No. 2101

Features

- resistant to mechanical stress
- various application possibilities
- resistant to all naturally occurring acids and alkali
- chemically and biologically neutral
- especially high passage of water
- quick and easy installation
- non-rotting

Application Example

“Extensive Green Roof Type Rockery Type Plants according to ETA-13/0668”

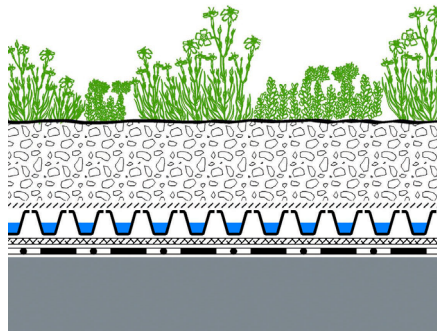

Plant layer
“Rockery Type Plants”

System Substrate
“Rockery Type Plants”, ca. 80 l/m²

Filter Sheet SF
Floradrain® FD 25-E
Protection Mat SSM 45

Roof construction with root resistant waterproofing



Specification Suggestion

Needled and thermally strengthened sheet of polypropylene; weight ca. 100 g/m², penetration force according to EN ISO 12236: ca. 1100 N, strength class 2, flow rate (H₅₀) according to EN ISO 11058: ca. 70 l/(m²·s), effective opening width (O₉₀) according to EN ISO 12956:

ca. 100 µm, delivery and installation according to manufacturer’s instructions.

Make: ZinCo Filter Sheet SF
Enquiries: ZinCo GmbH,
Phone: +49 7022 6003-0

