


# Product Data Sheet

Order No. 3402 / 3409  
3403 / 3415

## Retentions Spacer RSX 65 / RSX 80 / RSX 100 / RSX 150

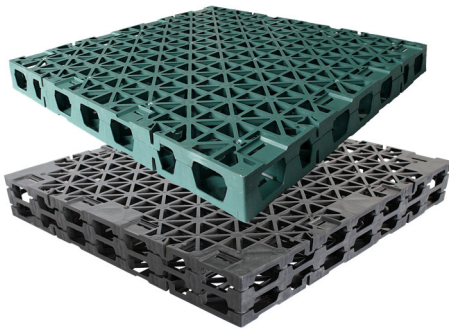

Powerful Spacer Elements made of polypropylene for their use on roof surfaces without any inclination, especially for retention build-ups meant for heavy load (e.g. in walkways and driveways).

### Technical Data

**Retentions Spacer RSX 65 / RSX 80 / RSX 100 / RSX 150**  
Heavy duty Spacer Element made of polypropylene, cavity volume > 95 %.

**Material:** 100 % Polypropylene  
**Dimensions:** ca. 0.60 m x 0.60 m  
**Compressive strength according to EN ISO 17151:** up to 50 t/m<sup>2</sup>

	Order No.	Height	Weight	Maximum retention volume:
RSX 65	3402	ca. 65 mm	ca. 6.2 kg/m <sup>2</sup>	ca. 60 l/m <sup>2</sup>
RSX 80	3409	ca. 80 mm	ca. 6.3 kg/m <sup>2</sup>	ca. 76 l/m <sup>2</sup>
RSX 100	3403	ca. 100 mm	ca. 6.5 kg/m <sup>2</sup>	ca. 95 l/m <sup>2</sup>
RSX 150	3415	ca. 150 mm	ca. 8.0 kg/m <sup>2</sup>	ca. 142 l/m <sup>2</sup>

### Accessories:

**Plastic Connector** Order No. 9622  
(requirement: 4 pieces per element  $\approx$  ca. 11 pcs./m<sup>2</sup>)




The Spacer Elements can be connected with each other using special interlocks.

### Features

- provides for additional water retention on roofs without inclination
- developed specially for its use under high loads (e.g. walkways and driveways)
- high retention volume
- spacious channel system for aeration and drainage
- biologically and chemically neutral
- on request also deliverable in greater heights

### Application Example

#### "Driveway with Retention Spacer RSX 65"

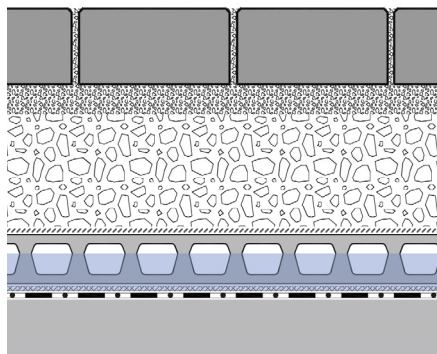

Paving slabs in a bedding of stone chippings

Gravel base layer

Filter Sheet PV

Retention Spacer RSX 65

Filter Sheet PV

Roof construction with waterproofing / waterproof concrete

### Specification Suggestion

Spacer Elements made of polypropylene, height ca. 65 / 80 / 100 / 150 mm, with an integrated multidirectional channel system, cavity volume > 95 %, max. retention volume ca. 60 / 76 / 95 / 142 l/m<sup>2</sup>, compressive strength up to 50 t/m<sup>2</sup>,

delivery and installation according to manufacturer's instructions.  
Make: ZinCo Retention Spacer RSX 65 / RSX 80 / RSX 100 / RSX 150  
Enquiries: ZinCo GmbH,  
Phone: +49 7022 6003-0

ZinCo Canada Inc.  
Head Office: 557 Carlisle Rd., Carlisle ON L0R 1H0  
B.C. Office: 22274 64 Ave, Langley, BC V2Y 2N8

E: greenroof@zinco.ca  
P: 905-690-1661

Life on Roofs

