





1 1/2" VERSASPAN STANDING SEAM

LOAD CAPACITIES BASED ON "GRADE A" STEEL, WITH
A MINIMUM YIELD STRENGTH OF 33000 PSI

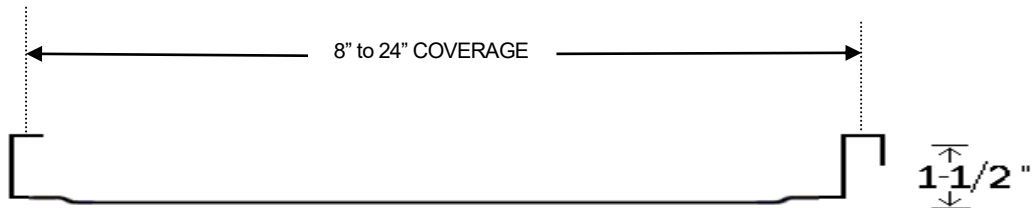

- OPTIONAL:**
- A) FLAT
 - B) STRIATIONS
 - C) STIFFENING RIBS

GAUGE	PANEL	SPAN IN FEET						
		1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"
24 ga.	12"	616	424	273	170	119	90	67
	16"	467	321	207	129	90	68	51
	20"	369	254	164	102	71	54	40
26 ga.	12"	335	230	166	119	82	61	48
	16"	254	174	126	90	62	46	36
	20"	201	137	100	71	49	36	28
		POUNDS PER SQUARE FOOT						

****Allowable Load (PSF) Based On:**

- **"Grade A" Steel with A Minimum Yield Strength of 33000 PSI;**
- **Three Span Condition;**
- **deflection OF L/240**

FINISHES AVAILABLE:

- A) SMP
- B) PVDF
- C) PLAIN GALVALUME