



LiveRoof MAXX SYSTEM

Over Conventional Roofing Assembly

SIDE VIEW

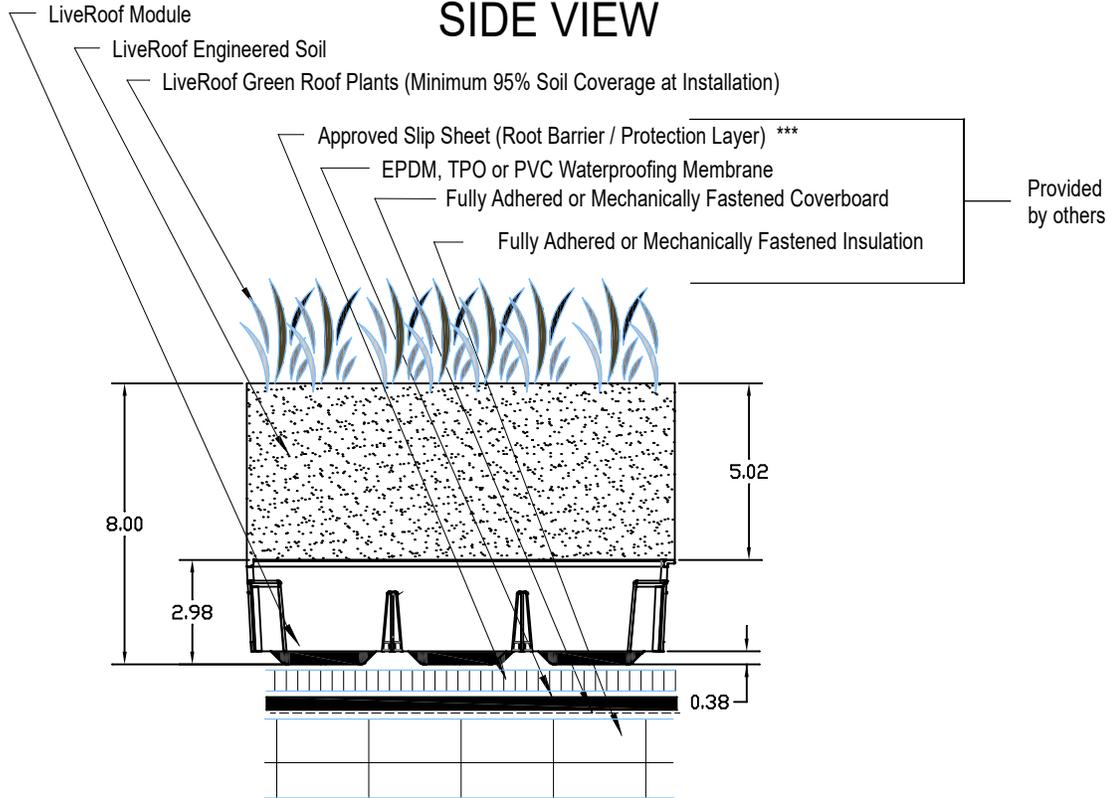

TOP VIEW (Empty Module)

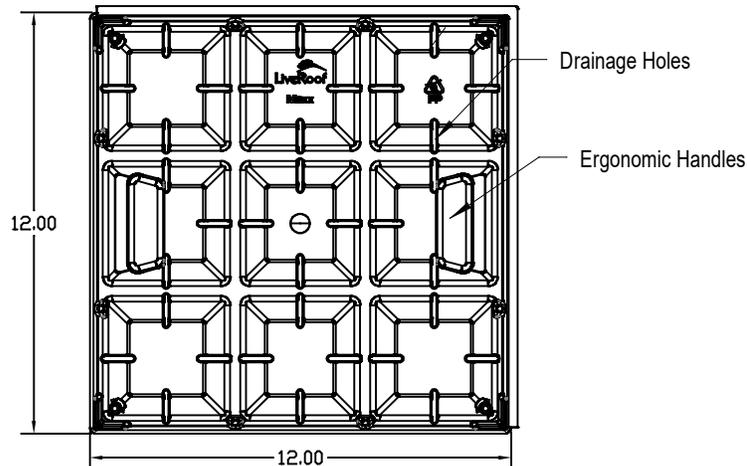

*** Examples of commonly used slip sheet (Root Barrier / Protection Layer) include minimum 40mil EPDM, TPO, PVC polypropylene, Polyolefin or other product depending type of roof and/or warranty. Installer to confirm compatibility of slip sheet (Root Barrier / Protection Layer) and waterproofing membrane with waterproofing membrane manufacturer.

LiveRoof System Saturated Weight: 60-65 lbs / sf + Retention Layer (Varies)

ILLUSTRATIONS ARE TO CONCEPTUALLY ASSIST PROFESSIONALS IN DESIGNING LIVEROOF INSTALLATIONS. LIVEROOF DOES NOT ACCEPT RESPONSIBILITY FOR ENGINEERING BASED ON ILLUSTRATIONS. A QUALIFIED ROOFING SPECIALIST SHOULD BE CONSULTED TO DETERMINE APPROPRIATE WATERPROOFING AND ROOF DECK MATERIALS AND SUITABLE DESIGN.

NOT TO SCALE

MAXX Conventional
2024-12-17



LiveRoof