

SOPRANATURE INSPECTION CHAMBER

TECHNICAL DATA SHEET 210413SCANE

(supersedes -)



VEGETATIVE SOLUTION
ACCESSORY PRODUCT

APPLICATIONS

ROOFS

PLAZA-DECKS

DESCRIPTION


The **INSPECTION CHAMBER** is made of 16 ga. (0.051 in) 5052-H32 aluminum with an untreated surface. It is 12 in (305 mm) in width and depth, and 5.8 in (148 mm) in height. The door is equipped with a latch so it can be locked up if required.

The **INSPECTION CHAMBER** makes drain inspection easier during the maintenance of the green roof. It also protects the drain against debris, dead leaves, gravel, etc.

INSTALLATION

Place the **INSPECTION CHAMBER** on the roof so as to cover the drain. Pour gravel around the drain while ensuring the flaps of the **INSPECTION CHAMBER** are properly covered, in order to hold the cage in place.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

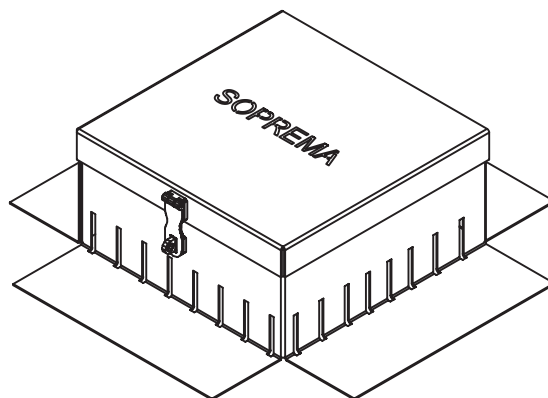

SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 1.877.MAMMOUTH

TDS-SOPRANATURE-INSPECTION-CHAMBER.indd

1/1